



## New Orleans Sports Arena

New Orleans, Louisiana

### Architect

Arthur Q. Davis FAIA & Partners  
Architects, New Orleans, LA

### Primary Engineer

Walter P. Moore and Associates,  
Houston, TX

### Roofing Contractor

Carrier Stumm, New Orleans, LA

### General Contractor

Manhattan Gibbs

### Owner

State of Louisiana



\* Information presented in this project profile is for illustration purposes only. Please consult the appropriate system manufacturer or design authority for system specifications and instructions for any specific system or assembly. Georgia-Pacific Gypsum does not provide roofing design services.



## DensDeck® Roof Board and Siplast Veral® Chosen for The New Orleans Sports Arena Roof\*

Moisture resistance and superior strength properties were two key attributes mentioned regarding the selection of DensDeck® Roof Board as the membrane substrate for Siplast's Veral® modified bitumen roofing membrane utilized on The New Orleans Sports Arena.

This prestigious 18,000 seat facility, built right behind the Superdome, opened in 1999 with a minor league hockey team and the Tulane University Men's basketball team expected to be the primary tenants.

"This roof presented some special design considerations," stated Kirk Hagstatt of Arthur Q. Davis Architects. "Due to the arena's size and the roof's unusual shape, the roof would be highly visible from ground level; therefore, appearance and long-term durability were the most important design considerations." Additionally, designers had to deal with potential severe wind exposures and high exterior relative humidity.

With these challenging parameters in mind, designers combined torched down Siplast Veral and Georgia-Pacific's DensDeck Roof Board to meet the rigorous demands required by this project. The aluminum clad surface of Veral fulfilled the architect's conceptual idea of a uniform rolling surface appearance and DensDeck Roof Board provided a firm, moisture-resistant, and dimensionally stable base to support the roofing membrane.

"The excellent modulus of rupture, high compressive strength, and moisture resistance of DensDeck will enhance roof wind uplift performance," stated T.W. Freeman, a Registered Roof Consultant from Newark, Ohio. "The superior strength of DensDeck provides greater wind uplift resistance and it reduces the chances of board fracture that often occurs at the base of fastener stress plates. This is especially true with a fully adhered torch down application such as this." Additionally, the combination of embedded glass matt surfacing and a water-resistant treated core make DensDeck Roof Board very conducive to adhesion.

Gretchen Dwyer, sales representative for Siplast stated, "The firm of Arthur Q. Davis automatically approves Siplast for all state projects. This is simply because of our track record in the city where many successful long term projects

*continued*

For more information about fiberglass mat gypsum panels, copies of our warranties or other product information, visit [www.gpgypsum.com](http://www.gpgypsum.com) or call 1-800-225-6119.

U.S.A. – Georgia-Pacific Gypsum LLC  
Canada – Georgia-Pacific Canada LP

#### Sales Information & Order Placement

U.S.A. Midwest: **1-800-876-4746**  
West: **1-800-824-7503**  
South: **1-800-327-2344**  
Northeast: **1-800-947-4497**

CANADA Canada Toll Free: **1-800-387-6823**  
Quebec Toll Free: **1-800-361-0486**

#### Technical Information

Georgia-Pacific Gypsum Technical Hotline  
U.S.A. and Canada: **1-800-225-6119**  
[www.gpgypsum.com](http://www.gpgypsum.com)


exist, such as the Louisiana Superdome. DensDeck was selected on this project due to its excellent strength properties and surface characteristics which allow for direct torching. It is a superior product when these properties are the necessary criteria.”

The New Orleans Sports Arena roofing system was installed over a 16 gauge (51 mil) metal deck assembly. After the installation of loose laid 2½” (64 mm) rigid Atlas AC II polyisocyanurate insulation, ¼” (6.4 mm) DensDeck® Roof Board was mechanically attached to the deck assembly with 4½” (114 mm) long OMG standard screws and 3” (76 mm) round ribbed OMG stress plates at the rate of nineteen fasteners per 4’ x 8’ (1,212 mm x 2,438 mm) board. This fastening frequency exceeds the current DensDeck Factory Mutual 1-90 wind uplift requirement for fully adhered modified bitumen membranes.

Finally, the torch applied aluminum clad Veral® system was installed to provide aesthetics and waterproofing protection. Veral is made up of two sheet components, namely Irex and Veral. The base ply, Irex, consists of a quality high-melt asphalt with random glass reinforcement. The top ply, Veral, combines a woven glass-reinforced, SBS-modified asphalt base with a protective metal foil facing.

The New Orleans Sports Arena roof presented some interesting challenges. Georgia-Pacific’s DensDeck Roof Board and Siplast Veral met these challenges. The roof is designed to serve long term as a design element as well as provide protection from the weather.

The roofing contractor, Carrier Stumm of New Orleans, installed 142,000 square feet (13,192 m<sup>2</sup>) of DensDeck on this project.

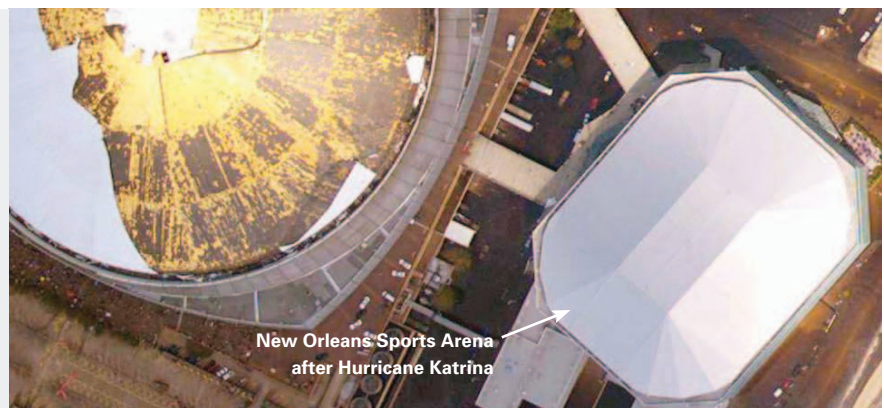

**TRADEMARKS** DENSDECK and the GEORGIA-PACIFIC logo are trademarks owned by or licensed to Georgia-Pacific Gypsum LLC. VERAL is a registered trademark of Siplast S.A.

**WARRANTIES, REMEDIES AND TERMS OF SALE**  
For current warranty information for this product, please go to [www.gpgypsum.com](http://www.gpgypsum.com) and select the product for

warranty information. All sales of this product by Georgia-Pacific are subject to our Terms of Sale available at [www.gpgypsum.com](http://www.gpgypsum.com).

**UPDATES AND CURRENT INFORMATION**  
The information in this document may change without notice. Visit our website at [www.gpgypsum.com](http://www.gpgypsum.com) for updates and current information.

**CAUTION For product fire, safety and use information, go to [www.gp.com/safetyinfo](http://www.gp.com/safetyinfo) or call 1-800-225-6119.**

**HANDLING AND USE-CAUTION** This product contains fiberglass facings which may cause skin irritation. Dust and fibers produced during the handling and installation of the product may cause skin, eye and respiratory tract irritation. Avoid breathing dust and minimize contact with skin and eyes. Wear long sleeve shirts, long pants and eye protection. Always maintain adequate ventilation.

Use a dust mask or NIOSH/MSHA approved respirator as appropriate in dusty or poorly ventilated areas.

**FIRE SAFETY CAUTION** Passing a fire test in a controlled laboratory setting and/or certifying or labeling a product as having a one-hour, two-hour, or any other fire resistance or protection rating and, therefore, as acceptable for use in certain fire rated assemblies/systems, does not mean that either a particular assembly/system incorporating the product, or any given piece of the product itself, will necessarily provide one-hour fire resistance, two-hour fire resistance, or any other specified fire resistance or protection in an actual fire. In the event of an actual fire, you should immediately take any and all actions necessary for your safety and the safety of others without regard for any fire rating of any product or assembly/system.

